


Jacks



A-Frame Trailer Jacks

Husky A-frame trailer jacks are designed in two styles: top-wind and side-wind, for use with all trailers. All Husky A-frame jacks come with a mounting bracket for easy bolt-on or weld-on mounting through A-frame mounted couplers. Husky jacks are available in a variety of weights (up to 5,000 lbs.) and adjustments (up to 11" adjustment) to meet all trailer needs. Finished in a durable powder coat finish and zinc plating.

Jack Specifications	Dim. A Fully Retracted	Dim. B	Dim. C	Dim. D	Dim. E Fully Retracted	Dim. F Outer Tube O.D.	Dim. G Inner Tube O.D.
Top Wind 30774, 1,000 lb.	22-3/16"	19-11/16"	13-11/16"	6"	2-1/2"	2"	1-3/4"
Top Wind 30775, 2,000 lb.	22-3/16"	20-1/8"	13"	7-3/16"	2"	2-3/16"	2"
Top Wind 30780, 5,000 lb.	21-1/2"	20-1/8"	10-11/16"	9-7/16"	1-1/4"	2-3/16"	2"
Side Wind 30781, 1,000 lb.	24-1/2"	15-1/2"	21-1/2"	6"	3"	2"	1-3/4"
Side Wind 30782, 2,000 lb.	25"	23"	16"	7"	2"	2-3/16"	2"

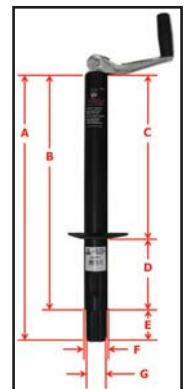

Description	Part #
Top-Wind Jacks	
1,000 lb. Capacity; Extends 23-1/4" below triangular bracket; Retracts to 8-1/2"; Provides 14-7/8" Lift	30774
2,000 lb. Capacity; Extends 23-1/2" below triangular bracket; Retracts to 9-1/4"; Provides 14-1/4" Lift	30775
5,000 lb. Capacity; Extends 25" below triangular bracket; Retracts to 10-3/4"; Provides 14-1/4" Lift. Recommended for use with foot pad	30780
Side-Wind Jacks	
Jack, 1,000 lbs.; Extends 24-1/4" below triangular bracket; Retracts to 9"; Provides 15-1/4" Lift	30781
Jack, 2,000 lbs.; Extends 23" below triangular bracket; Retracts to 9"; Provides 14-3/8" Lift	30782
Caster for Husky Jacks	
Wheel/Caster assembly, 2" w. x 6" dia. steel wheel, fits 2" jack tube; 1,200 lb. capacity	31718
Replacement Parts	
1000# side wind jack cap (PVC-ABS modifier 30)	31974
2000# side wind jack cap (PVC-ABS modifier 30)	31975